

# HHD 6006

## SOLVENT-FREE POLYURETHANE ADHESIVE

TECHNICAL DATA SHEET

Revised November 2021



### PRODUCT DESCRIPTION

HHD 6006 is a one-component, solvent-free, moisture curing hot-melt polyurethane adhesive. Once dispensed, the adhesive will react with ambient moisture or water content of the substrates to yield a cross-linked thermoset adhesive.

### KEY FEATURES

- Good flexibility
- Excellent adhesion to a variety of substrates including glass and metal
- Low temperature application
- High thermal stability
- Precision dispensing
- Good balance between strength and elasticity
- Good chemical resistance
- Resistance to sweat and sebum

### DIRECTIONS FOR USE

1. Remove the Al foil vacuum bag right before usage.
2. Pre-heat the syringe at recommended temperature if needed.
3. Remove the end cap and the skin on the adhesive surface.
4. Connect the syringe adapter.
5. Remove the cap and any block at the tip side.
6. Choose suitable needle and connect to the tip side for typical air dispensers.
7. Put the syringe into the heating unit make sure the adhesive is heated up to recommended application temperature.
8. Purge small amount of adhesive.
9. Apply an adequate amount of adhesive to one of the substrate, which is free of contamination such as oil, dust, mold release agents, etc.

10. Joint the substrates within adhesive open time

11. Press the joint pieces and dwell, allow the adhesive to grow up enough resistances.

### METHOD OF USE

Born2bond™ HMPUR solutions span a range of viscosities, providing flexibility in the choice of processing method. HHD 6006 can be applied by jetting, bead, swirl and spray. Typical application temperature range is 100-130°C

### APPLICATIONS

HHD 6006 is specifically designed for the assembly of electronic devices and can bond many kinds of substrates (PC, ABS, aluminum, glass, etc.).

### STORAGE/SHELF LIFE

HHD 6006 can be stored for 6 months in the original, unopened packaging in a dry place at temperatures between +15°C and +25°C. It should be processed immediately after the container has been opened. Keep containers covered to minimize contamination.

### HEALTH/SAFETY

The Safety Data Sheet is available on Bostik website and should be consulted for proper handling, cleanup and spill containment before use.

### LIMITATIONS

Material removed from containers may be contaminated during use. Do not return product to the original container. Bostik will not assume responsibility for product that has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Technical Service Center or customer service representative.

## PRODUCT CHARACTERISTICS

Appearance (uncured)	Light Yellow
Uncured Viscosity* (ASTM D1084: 130°C)	ca. 5000 mPa.s
Open time**	135 sec.
Operation Temperature	100°C - 130°C
Density - cured (ASTM D792)	1.1

\*based on Brookfield viscometer

\*\*Open time is an application parameter that depends on the environment temperature, substrates and application process.

## TYPICAL PERFORMANCE OF CURED MATERIAL

Cure rate is dependent upon substrate type, moisture permeability and ambient conditions. HHD 6006 will develop adhesive properties within 24 hours. However, optimum properties are achieved after three to seven days at room temperature.

For all the performance data provided in this TDS, the samples were prepared as follows : A 1.5mm\*2mm width adhesive bead was applied on PC to PC with a 0.12mm spacer. A 1kg weight was applied for 20 seconds on the sample, which was then cured for 3 days @ 23°C/50%RH before testing. The tests were performed at 2mm/min.

## CURED PHYSICAL PROPERTIES

Tensile Elongation at Break	950 %
Tensile Strength	11 MPa
Elastic Modulus (DIN 53504/ ISO37)	50 MPa
Curing Shrinkage (ISO 3521)	0.9%


## HAND HOLD SPECIFIC DATA

Sebum and sweat resistance*	Excellent
-----------------------------	-----------

\*Internal Test Methods


## CURING SPEED

Sample preparation and test conditions : A 1.5mm\*2mm width adhesive bead was applied on PC to PC with a 0.12mm spacer. A 1kg weight was applied for 20 seconds on the sample, which was then cured for 7 days @ 23°C/50%RH. The performed @ 2mm/min.

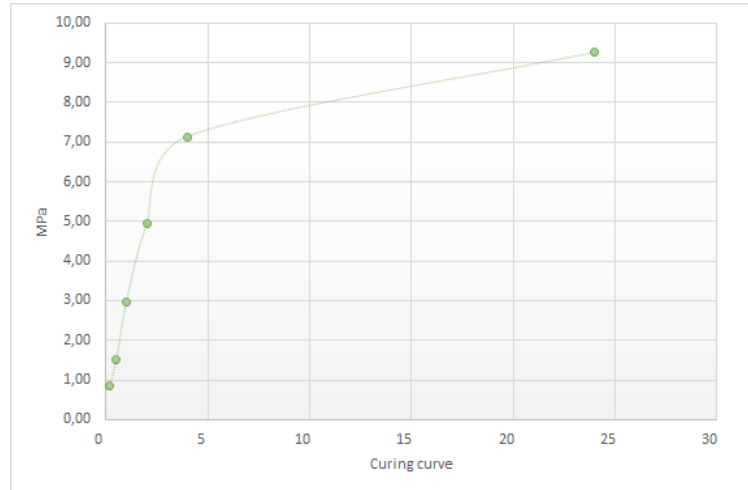

## APPLICATION PROCESS - VISCOSITY

Test Method: Brookfield, spindle 27 @ 20rpm, 27°C @ 60% H, 11.6g sample, idle 30min at each temperature.

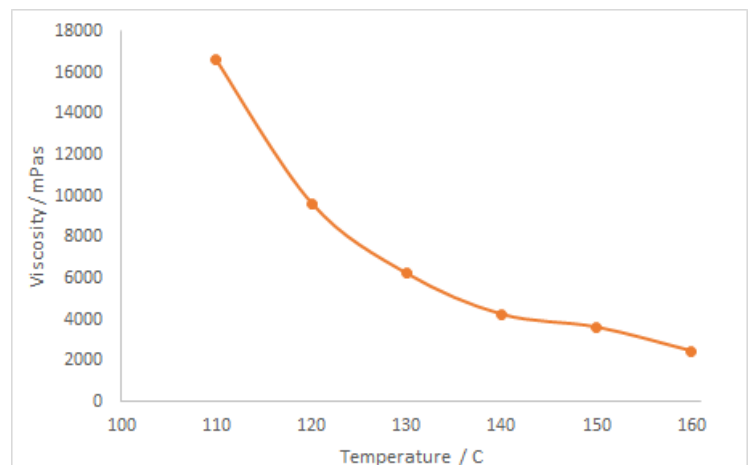


## BONDING PERFORMANCE

Glass - Glass (Bare)	1
PC - PC	10
ABS - ABS	7
304 Steel - 304 Steel	3
Rilsan <sup>®</sup> PA 820 - PA 820 with Supporting	3
Rilsan <sup>®</sup> PA 820 - Steel	3

## HOT STRENGTH

Sample preparation and test conditions : A 1.5mm\*2mm width adhesive bead was applied on PC to PC with a 0.12mm spacer. A 1kg weight was applied for 20 seconds on the sample, which was then cured for 7 days @ 23°C/50%RH. The performed @ 2mm/min after heat exposure for 5min in the chamber.

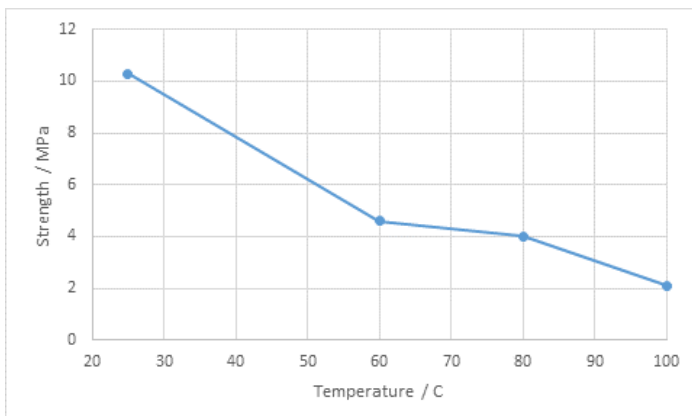

## SEBUM AND SWEAT RESISTANCE

Sample preparation and test conditions : A 1.5mm\*2mm width adhesive bead was applied on PC to PC with a 0.12mm spacer. A 1kg weight was applied for 20 seconds on the sample, which was then cured for 3 days @ 23°C/50%RH before soaking in sebum and sweat at 45°C for 7 days. The tests were performed at 2mm/min.

Strength after exposure to sweat or Sebum			
PRODUCT	Before	After sebum	After sweat
HHD 6006	10,3	6,3	8,3

## CONVERSIONS

$$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$$

$$\text{kV/mm} \times 25.4 = \text{V/mil}$$

$$\text{mm} / 25.4 = \text{in}$$

$$\mu\text{m} / 25.4 = \text{mil}$$

$$\text{N} \times 0.225 = \text{lb}$$

$$\text{N/mm} \times 5.71 = \text{lb/in}$$

$$\text{N/mm}^2 \times 145 = \text{psi}$$

$$\text{MPa} \times 145 = \text{psi}$$

$$\text{N}\cdot\text{m} \times 8.851 = \text{lb}\cdot\text{in}$$

$$\text{N}\cdot\text{mm} \times 0.142 = \text{oz}\cdot\text{in}$$

$$\text{mPa}\cdot\text{s} = \text{cP}$$

## **PRODUCT DISCLAIMER**

Bostik offers this Technical Data Sheet ("TDS") for descriptive and informational use only. It is not a warranty, a contract or a substitute for expert or professional advice. Please also see the local product Safety Data Sheet for health and safety considerations.

The statements, technical information, data, and recommendations contained in this TDS are provided 'AS IS' and are not warranted or guaranteed in any way. They represent typical results for the products and are based on Bostik's research only. Since the conditions and methods of use of the products are beyond our control, Bostik expressly disclaims any and all liability and damages of whatever kind or nature that may arise from any use of the products, the results therefrom, or reliance on the information contain herein.

This TDS is one of several tools that may be used to help you find the product best suited for your needs. It is used at your own risk, and by using it, you are knowingly accepting and assuming any and all risks associated with its use and recommendations. BUYERS AND USERS ASSUME ALL RESPONSIBILITY AND LIABILITY FOR ANY AND ALL LOSS OR DAMAGE OF WHATEVER KIND OR NATURE ARISING FROM OR RELATED TO THE HANDLING OR USE OF BOSTIK'S PRODUCTS. The performance of the product, its shelf life, and application characteristics will depend on many variables, including but not limited to the kind of materials to which the product will be applied, the environment in which the product is stored and/or applied,

and the equipment used for application, among other things. Any change in any of these variables can affect the product's performance. You are responsible to test the suitability of any product in advance for any intended use or application. Bostik does not guarantee the reliability, completeness, use, or function of the statements, technical information, data, and recommendations contained in this TDS. Nothing contained herein constitutes a license to practice under any patent, and it should not be construed as an inducement to infringe any patent. You are advised to take appropriate steps to be sure that any proposed use of the products will not result in patent infringement.

The information provided herein relates only to the specific products designated and may not be applicable when such products are used in combination with other materials or in any process. The product is sold pursuant to a supply agreement and/or Bostik's Terms and Conditions of Sale, which set forth the sole warranty, if any, that applies to the product. **NO OTHER WARRANTY, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE OR WARRANTY OF MERCHANTABILITY, IS MADE CONCERNING THE PRODUCTS DESCRIBED OR THE INFORMATION PROVIDED HEREIN, AND TO THE MAXIMUM EXTENT ALLOWED BY LAW, SUCH WARRANTIES ARE HEREBY DISCLAIMED. BOSTIK DISCLAIMS ANY LIABILITY FOR DIRECT, INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES TO THE MAXIMUM EXTENT ALLOWED BY LAW.**